




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: A61L 2/18, B65B 69/00	A1	(11) International Publication Number: WO 96/00092 (43) International Publication Date: 4 January 1996 (04.01.96)
(21) International Application Number: PCT/US95/06980 (22) International Filing Date: 2 June 1995 (02.06.95) (30) Priority Data: 08/264,736 23 June 1994 (23.06.94) US (71) Applicant: STERIS CORPORATION [US/US]; 5960 Heisley Road, Mentor, OH 44060 (US). (72) Inventor: KOCHTE, Werner, W.; 1841 Pleasant Valley Drive, Kent, OH 44241 (US). (74) Agent: KOCOVSKY, Thomas, E., Jr.; Fay, Sharpe, Beall, Fagan, Minnich & McKee, Suite 700, 1100 Superior Avenue, Cleveland, OH 44114-2518 (US).		(81) Designated States: AU, CA, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

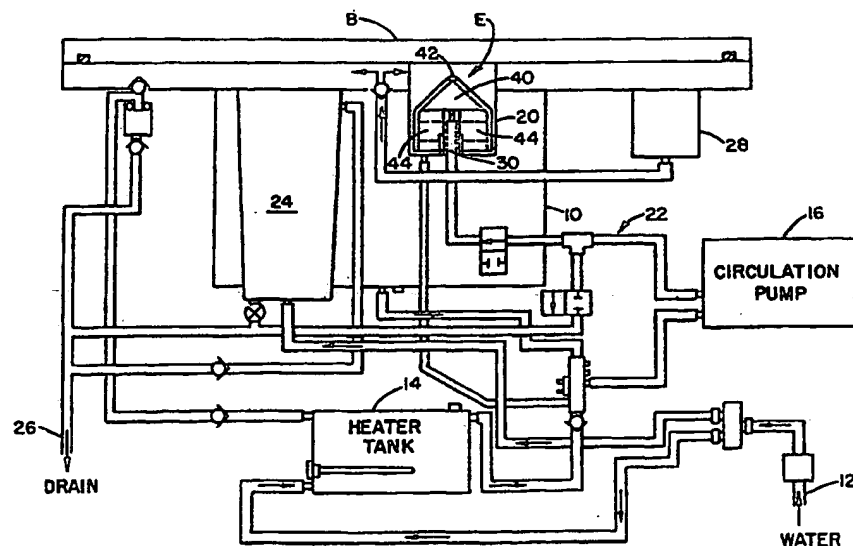(54) Title: CUTTER FOR OPENING STERILANT REAGENT CUPS**(57) Abstract**

A door (B) of a countertop decontamination unit (A) is opened to gain access to a well (20) for receiving an anti-microbial agent carrying cup (D). A knife blade assembly (E) includes a central shaft (30) which supports a blade (40). The blade has cutting edges (46) extending in a sloped manner downward from an apex portion (42) of the blade. The blade is divided into two blade sections (44) by the shaft. The cutting edges have beveled peripheral edges which face the front of each blade section. The blades have a curvilinear configuration that defines oppositely facing upper and lower cam surfaces (50, 52). The central shaft has apertures (34a, 34b, 34c) communicating between a shaft interior passage (32) and the outside of the shaft for providing jets of fluid to the inside of the reagent cup for dissolving and flushing the reagent material from the cup. The curved configuration of the blades deflect fluid flow from the apertures into the reagent cup.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

CUTTER FOR OPENING STERILANT REAGENT CUPS**Background of the Invention**

The present invention relates to the decontamination art. It finds particular application in conjunction with sterilizing or disinfecting medical, dentistry, veterinary, mortuary, and laboratory instruments and equipment and will be described with particular reference thereto. It will be appreciated, however, that the invention is also applicable to a wide variety of technologies in which reagents are mechanically released at the time of use.

Decontamination connotes the removal of hazardous or unwanted materials, such as bacteria, mold spores, other pathogenic life forms, radioactive dust, and the like. Disinfection connotes the absence of pathogenic or harmful life forms. Sterilization connotes the absence of all life forms, whether pathogenic or not. Often, sterilization is measured against the elimination of bacterial endospores which are the living organisms most resistant to conventional sterilants. Microbial decontamination is used herein as the term generic to both sterilization and disinfection.

Heretofore, medical, dental, surgical, veterinary, and laboratory equipment and instruments have often been sterilized in a steam autoclave. Autoclaves kill life forms with a combination of high temperature and pressure. However, steam autoclaves have several drawbacks. The high temperature and pressure vessels tend to be bulky and heavy. The high temperature and pressure tends to curtail the useful life of the endoscopes, rubber

- 2 -

and plastic devices, lenses, bearings, and portions of devices made of polymeric materials, and the like. Moreover, the autoclave sterilizing and cool down cycle is sufficiently long that multiple sets of the medical instruments are commonly required.

Instruments which cannot withstand the pressure or temperature of the oven autoclave are often sterilized with ethylene oxide gas, particularly at larger medical facilities or hospitals. However, the ethylene oxide sterilization technique also has several drawbacks. First, the ethylene oxide sterilization cycle is even longer than the steam autoclave cycle. Another drawback is that ethylene oxide sterilization is sufficiently sophisticated that trained technicians are commonly required, making it unsuitable for physician and dental offices and for other smaller medical facilities. Yet another drawback is that some medical equipment can not be sterilized with ethylene oxide gas.

Liquid sterilization systems have also been utilized for equipment which could not withstand the high temperatures of steam sterilization. Commonly, a technician mixes a liquid sterilant composition and manually immerses the items to be sterilized. The high degree of manual labor introduces numerous uncontrolled and unreported variables into the sterilization process. There are quality assurance problems with the weakening of the sterilants due to aging on the shelf, technician error in the mixing of sterilants, technician error in the control of the immersion times, technician error between immersion and the rinsing of residue, technician error in exposure to the ambient atmosphere after the rinsing step, and the like.

Another problem with the prior art liquid system resides in the corrosive nature of the strong oxidants that are commonly used as liquid sterilants. Normally, the sterilized items are rinsed to remove chemical residues. This rinsing also adds a variable that reduces the

- 3 -

assurance the item has been disinfected or sterilized. Once rinsed, the item is susceptible to reinfection by airborne microbes.

In U.S. Patent No. 5,209,909 also of the assignee
5 herein, a reagent system was described which used only powdered reagents. The powdered reagents were stored in separate compartments in a two-compartment cup. The two-compartment cup was cut open with knife blades and the two reagents were dissolved in high pressure water. The
10 dissolved reagents reacted to form a sterilant solution with buffers, corrosion inhibitors, wetting agent, and the like.

The all powdered formulation has some notable advantages over the liquid peracetic acid system. Severe
15 restrictions by airlines effectively limit the shipment of liquid peracetic acid to surface transportation. Because liquid peracetic acid has a limited shelf life over which full potency can be assured, precise timing is required to ship the liquid peracetic acid sterilant systems overseas
20 and have them arrive with a satisfactory remaining shelf life.

The present invention provides a new and improved cutter assembly which is ideal for opening powdered reagent containers.

25 Summary of the Invention

In accordance with the present invention, a cutting blade assembly is provided for cutting open a reagent containing package. A central shaft defines a hollow interior passage for receiving fluid flow from a
30 fluid circulating system. The shaft has at least two apertures communicating between the hollow interior passage and the outside of the shaft for directing the fluid flow into the reagent package. A cutting blade which is mounted on the central shaft has an apex for puncturing a bottom of
35 the reagent package. The cutting blade is divided by the central shaft to form two opposite but analogous blade

- 4 -

sections on opposite sides of the central shaft. Each blade section has a cutting edge and a curvilinear configuration for deflecting fluid flow into the reagent package to promote complete mixing of the reagent and the fluid.

In accordance with a more limited aspect of the present invention, the curvilinear configuration of each blade section defines cam surfaces that engage and separate cut edges of the reagent package.

In accordance with another aspect of the present invention, a method of opening a frangible package is provided. The frangible package, which has a base wall and a peripheral wall, is inserted base wall first into a package receiving well. As the package is received, the base wall is pierced at its center with an apex portion of a cutting blade. With continued insertion of the package into the well, the cutting blade cuts deeper into the base wall and cuts into the peripheral walls. With further continued insertion of the package into the well, portions of the base and peripheral walls are cammed apart adjacent the cuts made by the cutting blade.

In accordance with a more limited aspect of the present invention, the package contains at least one dry reagent in its interior. The dry reagents are flushed from the interior of the package by spraying jets of water from a central shaft of the cutting blade and deflecting at least part of the jets with the cutting blade to increase turbulence.

One advantage of the present invention is that it opens the reagent package such that all dry reagents are completely dissolved.

Another advantage of the present invention is that it facilitates fluid flow into and out of the interior of the reagent package.

Still further advantages of the present invention will become apparent to those of ordinary skill in the art

- 5 -

upon reading and understanding the following detailed description of the invention.

Brief Description of the Drawings

The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating a preferred embodiment and are not to be construed as limiting the invention.

FIGURE 1 is a perspective view of a counter top decontamination unit;

FIGURE 2 is a front view of the decontamination unit of FIGURE 1 with the front door open;

FIGURE 3 is a plumbing diagram of the anti-microbial solution carrying paths of the decontamination unit of FIGURE 1;

FIGURE 4 is a top view of the cutter assembly of FIGURES 2 AND 3;

FIGURE 5 is a side view of the cutter assembly;
FIGURE 6 is a front elevational view of the cutter assembly; and

FIGURE 7 is a sectional view of a reagent cup or package.

Detailed Description of the Preferred Embodiment

With reference to FIGURES 1 and 2, a sterilizing apparatus A is configured to sit on a countertop or other convenient work surface. A front door B is manually openable to provide access for inserting a cartridge C and a sterilant cup or ampule D, into the system. Upon insertion of the cup or ampule D, the bottom of the cup or ampule is punctured by an apex of a cutter assembly E. Items to be sterilized are loaded in the cartridge C which is slidably received in a sterilizing or decontamination cartridge receiving chamber 10. The chamber 10 is open at the front to receive a free flow of sterilant through the front.

- 6 -

With particular reference to FIGURES 2 and 3, water from an inlet 12 is selectively heated in a heater tank 14 and circulated by a circulation pump 16 to a sterilant or other microbial decontamination solution mixing chamber 20. The mixing chamber 20 receives the cup D containing a premeasured dose of a microbial decontamination concentrate, preferably in powdered form. The water is sprayed into the cup or ampule D through the cutter assembly E, as discussed below, to for a sterilant or other anti-microbial solution.

After the circulation pump 16 circulates the heated water through the mixing chamber 20, the anti-microbial solution flows through a series of passageways 22 defined in part by the outer face of the housing A and the inner face of the door B. The passageways carry the anti-microbial solution over an inner surface of a rinse fluid sterilizing filter 24 and into the sterilizing or decontamination chamber 10. The anti-microbial solution is circulated through the flow passages such that every surface from the rinse water filter 24 downstream through the passages 22 and the decontamination chamber 10 are microbially decontaminated, preferably sterilized. After a preselected duration, the solution exits the apparatus at a drain 26 and rinse water is introduced. The rinse water flows into the filter 24 which filters at least all harmful microbes from the incoming water, i.e. at least disinfects the rinse water. The circulation pump 16 circulates the microbially decontaminated rinse water through the paths 22, the decontamination chamber 10, and the cassette or cartridge C. In order to prevent contamination from airborne microbes, an air microbe decontamination filter 28 filters air which is drawn into the system to replace the drained rinse and anti-microbial solutions.

With continuing reference to FIGURES 2 and 3, and particular reference to FIGURES 4, 5 and 6, the anti-microbial mixing chamber 20 holds the cutter assembly E for selectively opening the reagent-containing cup D as it is

- 7 -

inserted into the anti-microbial mixing chamber 20 and the door B is closed for use or sterilization to begin. The cutting assembly E includes a hollow central shaft 30 extending upward along the central axis of the well of mixing chamber 20. The shaft defines a hollow interior passage 32 in fluid communication with the circulation pump 16. Located along the axis of the shaft 30 are two upper apertures 34a that direct jets of water upward into an interior of the cup D. A pair of middle apertures 34b are positioned on opposite sides of the shaft 30 to direct jets of water transversely. A lower pair of apertures 34c directs water radially outward into the cup. Of course, the number of apertures 34 and the placement thereof on the shaft can be varied to suit larger or smaller units. Further, the apertures can be defined by round holes, slits, or other appropriate configurations.

The apertures 34a, 34b and 34c communicate between the hollow passage 32 inside of the shaft 30 and the inside of the reagent cup D. The fluid under pressure that is discharged through these apertures, flushes and dissolves powdered reagents held in cup D. It will be understood by the skilled artisan that, depending on the size and power of the cups and the unit, a larger or smaller number of apertures may be provided.

Now then, affixed to the shaft 30 is a cutting blade or means 40, which rests or is seated across the horizontal, flat top surface of the shaft 30. The blade 40 has an apex portion 42 which extends above the shaft 30. The apex portion 42 pierces the bottom dome of the reagent cup D upon insertion of the cup into the chamber 20. The blade 40 has two like side sections 44 disposed on either side of the shaft extending downward below the apex portion 42. Cutting edges 46 slope in opposite directions away from apex portion downward along the side blade sections 44 terminating adjacent a bottom of the chamber 20. The cutting edges 46 are bevelled facing in opposite directions to aid in piercing and cutting the reagent cup D. The

- 8 -

beveled cutting edges 42 each angle toward the front face of a corresponding blade side section and extend the full length of the blade, from the apex to the bottom thereof.

The blade 40 has curvilinear configuration which
5 defines an upper cam surface 50 and an opposite facing lower cam surface 52. The upper cam surface 50 projects outward in the same direction as the bevelled face of the cutting edge. The cam surface engages a cut edge of the cup just after it has been cut by the cutting edge 46. The
10 lower cam surface 52 projects opposite to the upper cam surface. The lower cam surface engages an opposite cut edge of the cup. Together the upper and lower cam surfaces hold the cut portions of the cup open.

The curvilinear blade configuration sweeps around
15 the middle apertures 34b and the lower apertures 34c. The under surfaces of the cams deflect jets of water from the apertures and swirling water in the chamber 20 to enhance water flow and a complete flushing of all reagents from the cup.

20 With reference to FIGURE 7, the reagent cup D includes a first or outer cup 60 that holds a first powdered reagent. The outer cup 60 includes a cylindrical peripheral wall 62 that has a flange 64 at a first, open end thereof. A domed base wall 66 closes a second,
25 opposite end of the peripheral wall. The outer cup is constructed of a light weight polymeric material, such as a styrene plastic, which has sufficient resiliency that the domed base wall 66 functions as a spring.

A second or inner cup portion 70 is received in
30 the first cup portion 60. The second cup portion has a generally conical peripheral wall 72 that has a flange 74 integrally molded at a first, open end thereof. A base wall 76 closes a second end of the peripheral wall. The inner cup holds a first powdered reagent.

35 The first and second cup portions are configured such that when the flanges 64, 74 are abutting and sealed

- 9 -

together, the base walls 66, 76 abut and flex the dome 66 slightly.

5 The second peripheral wall 72 has a recessed groove 78 that extends longitudinally there along to define access for filling an annular outer compartment 80 defined between the inner cup peripheral wall 72 and the outer cup peripheral wall 62 with a second powdered reagent. When the cutter assembly E enters the cup from the bottom, there is a tendency for one or both of the cups to collapse under
10 the force of the cutter blade rather than being cut. The conical inner cup peripheral wall 72 interacts with the outer cup peripheral wall 62 to provide increased structural rigidity against vertical compression. A closure 82 is adhered to the flange 74 to seal the two
15 chambers concurrently.

In use, as the reagent cup D is pressed down onto the cutting blade 40, the base wall 62 engages the blade apex portion 42. Further pressure causes the cutting edges 46 to slice from the puncture point through the bottom wall
20 62 and the inner and outer peripheral walls 62, 72. With continued pressure, the blade side portion 44 cuts through the inner and outer cup peripheral walls 52, 62. The cam surfaces 50, 52 of the blade 40 cam the edges of the cup peripheral walls open extending the cut higher.

25 After the door B is closed and a decontamination cycle is started, the hot water is pumped into the shaft 30. The water sprays through the upper jets or apertures 34a and sprays into the upper reaches of the inner cup. Water spraying through the center and lower jets or
30 apertures 34b and 34c spray into the central and lower regions of both compartments. The serpentine configuration of the blades 40 serves to deflect fluid spray to further ensure total removal of all reagent matters from both chambers of the cup D.

35 Various anti-microbial agents may be utilized. In the preferred embodiment, the anti-microbial agent is a mixture of powders which reacts when wet to form a

- 10 -

sterilant, such as a strong oxidant, corrosion inhibitors, and a wetting agent. More specific to the preferred embodiment, the dry ingredients include a water-soluble acid precursor and a water-soluble persalt which, when dissolved in water, form a peracetic acid solution with an anti-microbially effective concentration of peracetic acid. The dry ingredients further include a buffer, e.g. a borate, for bringing the pH to a neutral level to inhibit steel corrosion. The dry ingredients include other corrosion inhibitors, such as a molybdate for inhibiting steel corrosion, a triazole for inhibiting copper and brass corrosion, and the like. Powdered wetting and sequestering agents may also be included. In the preferred embodiment, the acid precursor is acetylsalicylic acid and the persalt is sodium perborate. The total volume of dry ingredients is such that the resultant water solution has a concentration of peracetic acid of at least 0.2% W/V of a biocidally effective concentration.

Other oxidizing or anti-microbial agents can also be generated in situ, such as chlorine dioxide, chlorine, hydrogen peroxide, and mixtures thereof. For example, the powdered ingredients may include a mixture of potassium chromates, sodium chloride, and phosphates. As another example, hydrogen peroxide can be generated from a mixture of sodium borate and phosphates. Chlorine dioxide can be generated from a mixture of sodium chlorate and lithium chlorite. Sodium chloride can be added to peracetic acid to produce hyperchlorous acid.

Other copper and brass corrosion inhibitors are also contemplated, such as benzotriazoles, polytriazoles, mercaptobenzathiazol, azoles, benzoates, and other five-membered ring compounds. Other anti-corrosives include chromates, dichromates, tungstates, vanadates, borates, and combinations thereof. A suitable sequestering agent for sequestering any precipitated calcium and magnesium salts is sodium hexametaphosphate.

- 11 -

Having thus described the preferred embodiment, the invention is now claimed to be:

1. A cutting blade assembly (E) for cutting open a reagent containing package (D), the cutting blade assembly comprising:

5 a central shaft (30) defines a hollow interior passage (32) for receiving fluid flow from a fluid circulating system, the shaft further having at least two apertures (34) communicating between the hollow interior passage of the shaft and the outside of the shaft for directing the fluid flow into the reagent containing
10 package;

a cutting blade (40) mounted on the central shaft and having an apex (42) for puncturing a bottom (66) of the reagent package, the cutting blade being divided by the central shaft to form two opposite but similar blade
15 sections (44) on opposing sides of the central shaft;

each blade section having a cutting edge (46) and a curvilinear configuration for deflecting fluid flow into the reagent containing package to promote complete mixing of the reagent and the fluid.

2. The blade assembly as set forth in claim 1 wherein the curvilinear configuration of each blade section defines an upper cam surface (50) that projects to one side of the central shaft and a lower cam surface (52) that
5 projects to an opposite side of the central shaft whereby the cam surfaces engage and separate cut edges of the reagent package.

3. The blade assembly as set forth in claim 2 wherein the central shaft has:

upper apertures (34a) on opposing sides of the cutting blade apex;

5 central apertures (34b) in a central portion of the central shaft adjacent the upper cam surface such that

- 12 -

fluid directed therefrom is deflected into the reagent package; and

10 lower apertures (34c) in a lower portion of the centered shaft adjacent the lower cam surface such that fluid directed therefrom is deflected into the reagent package.

4. The blade assembly as set forth in claim 1 wherein the central shaft upper has apertures (34a) at the top which define upward directed jets and lower apertures (34c) on the lower portion thereof.

5. The blade assembly as set forth in claim 4 wherein the lower apertures are positioned on opposing sides of the central shaft and directed parallel to the blade sections.

6. The blade assembly as set forth in claim 1 wherein the cutting edges of the respective blade sections are bevelled with bevels that face in opposite directions.

7. The blade assembly as set forth in claim 1 wherein the reagent package holds a first powdered component and a second component, the first and second powdered components reacting in the fluid to form an
5 oxidant.

8. A method of opening a frangible package comprising:

inserting the frangible package (D), which has a base wall (66) and a peripheral wall (62), base wall first
5 into a package receiving well (20);

as the package is received, piercing the base wall at the center thereof with an apex portion (42) of a cutting blade (40);

10 with continued insertion of the package into the well, cutting deeper into the base wall and cutting into

- 13 -

the peripheral walls with sloping cutting edges (46) of the cutting blade;

with continued insertion of the package into the well, camming (50, 52) apart portions of the base and peripheral walls adjacent the cuts made by the cutting blade.

9. The method as set forth in claim 9 wherein the package contains a dry reagent in an interior thereof and further including flushing the dry reagent from the interior of the package by spraying jets of water from a central shaft of the cutting blade and deflecting at least part of the jets with the cutting blade to increase turbulence.

10. The method as set forth in claim 9 wherein the package has concentric inner (72) and outer (62) peripheral walls that define an inner compartment (70) and an outer annular compartment (80), one of the compartments containing a powdered acid precursor and the other containing a powdered persalt and further including:

reacting the acid precursor and the persalt in situ in the water to form an oxidant solution.

1/4

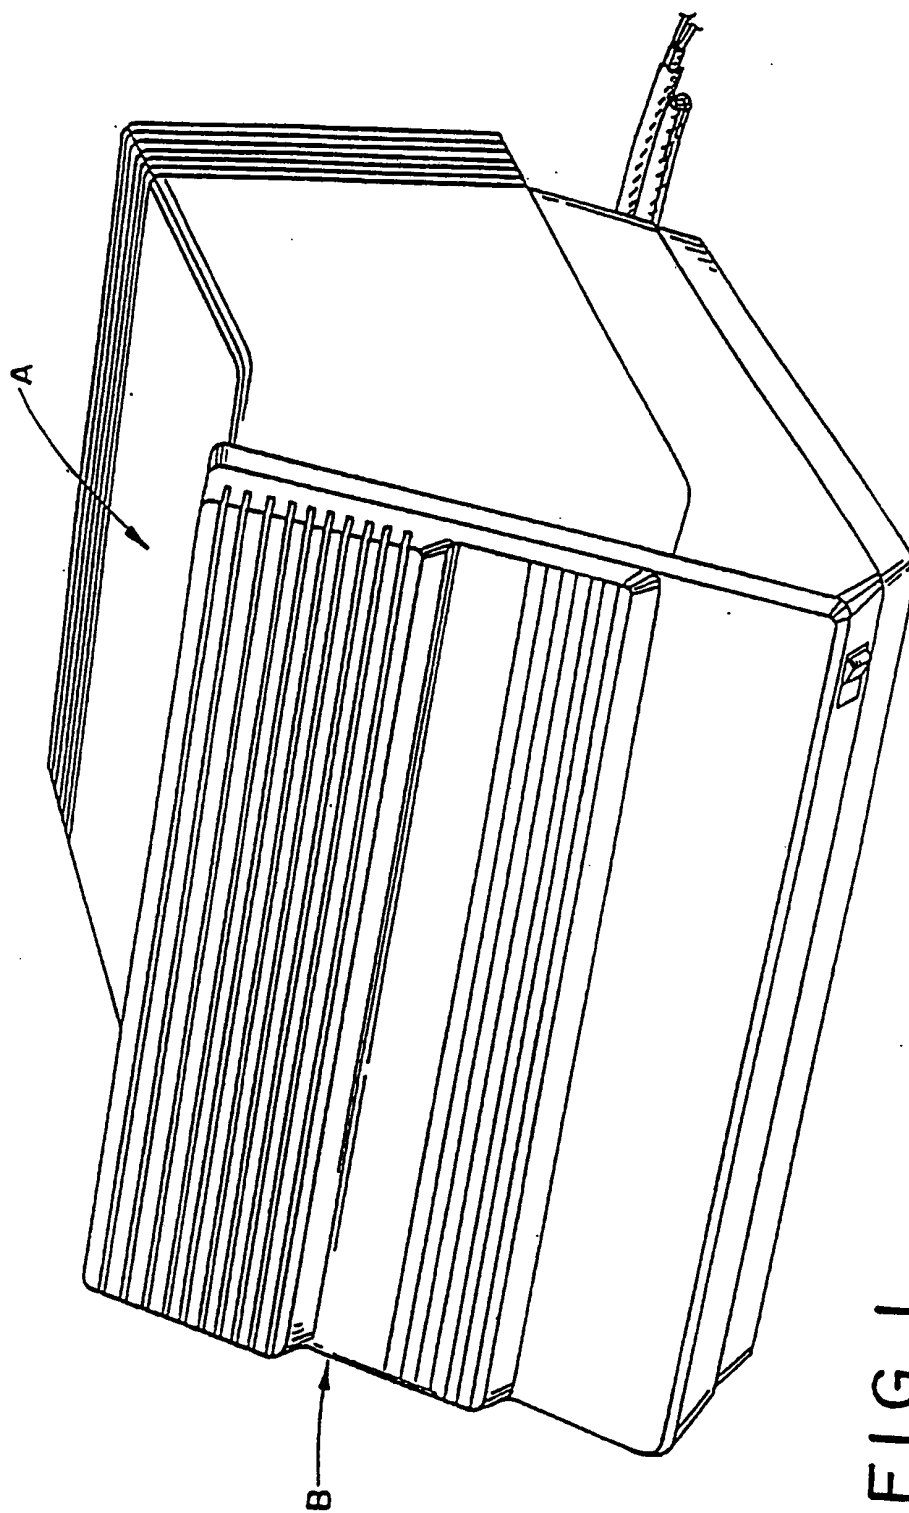


FIG. 1

2/4

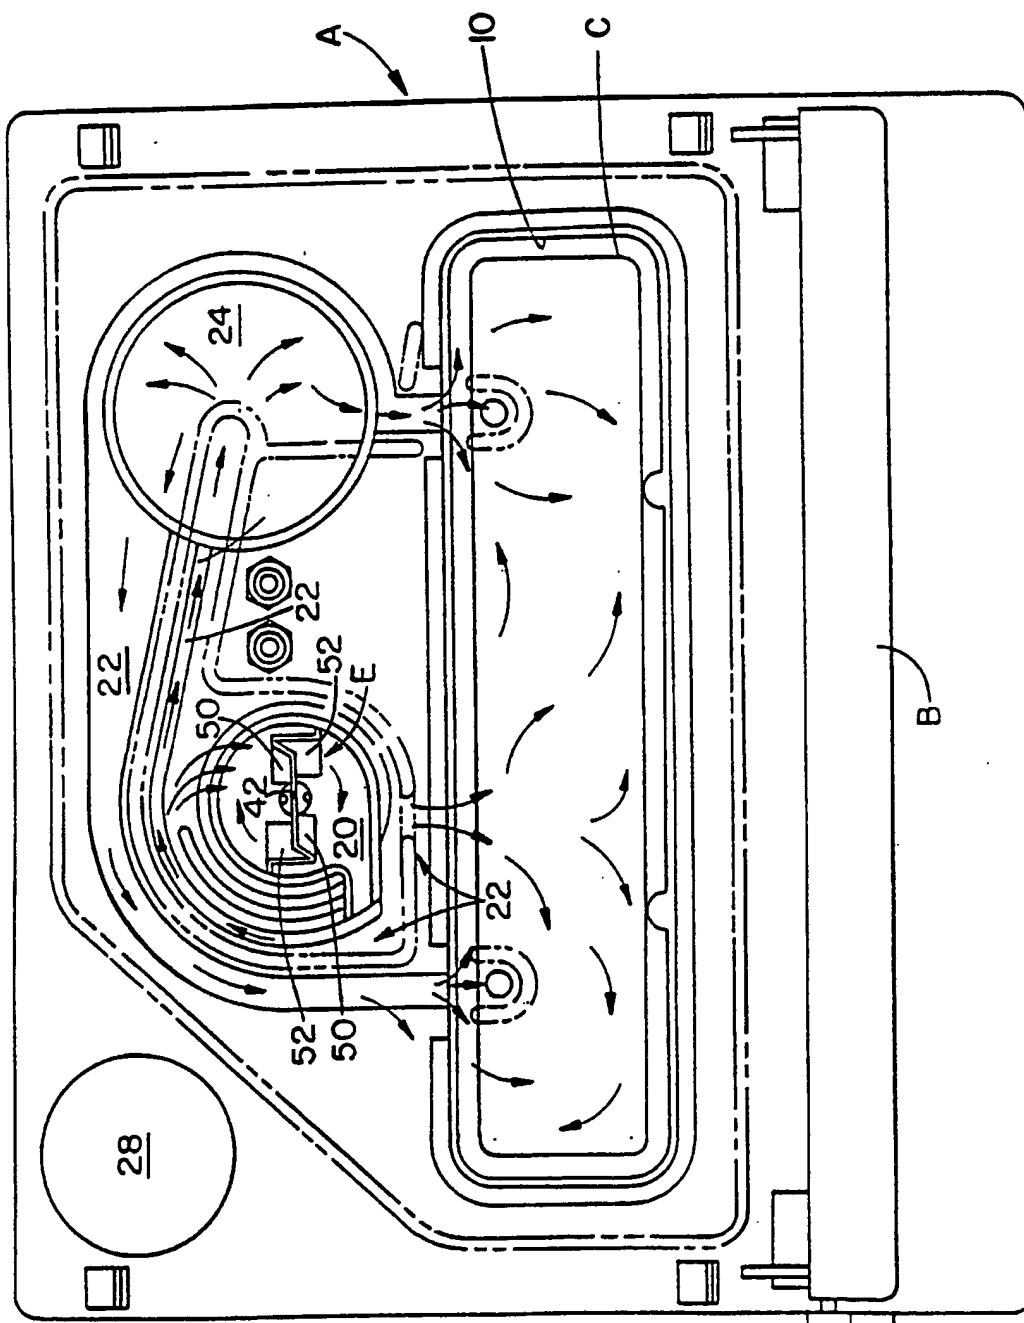


FIG. 2

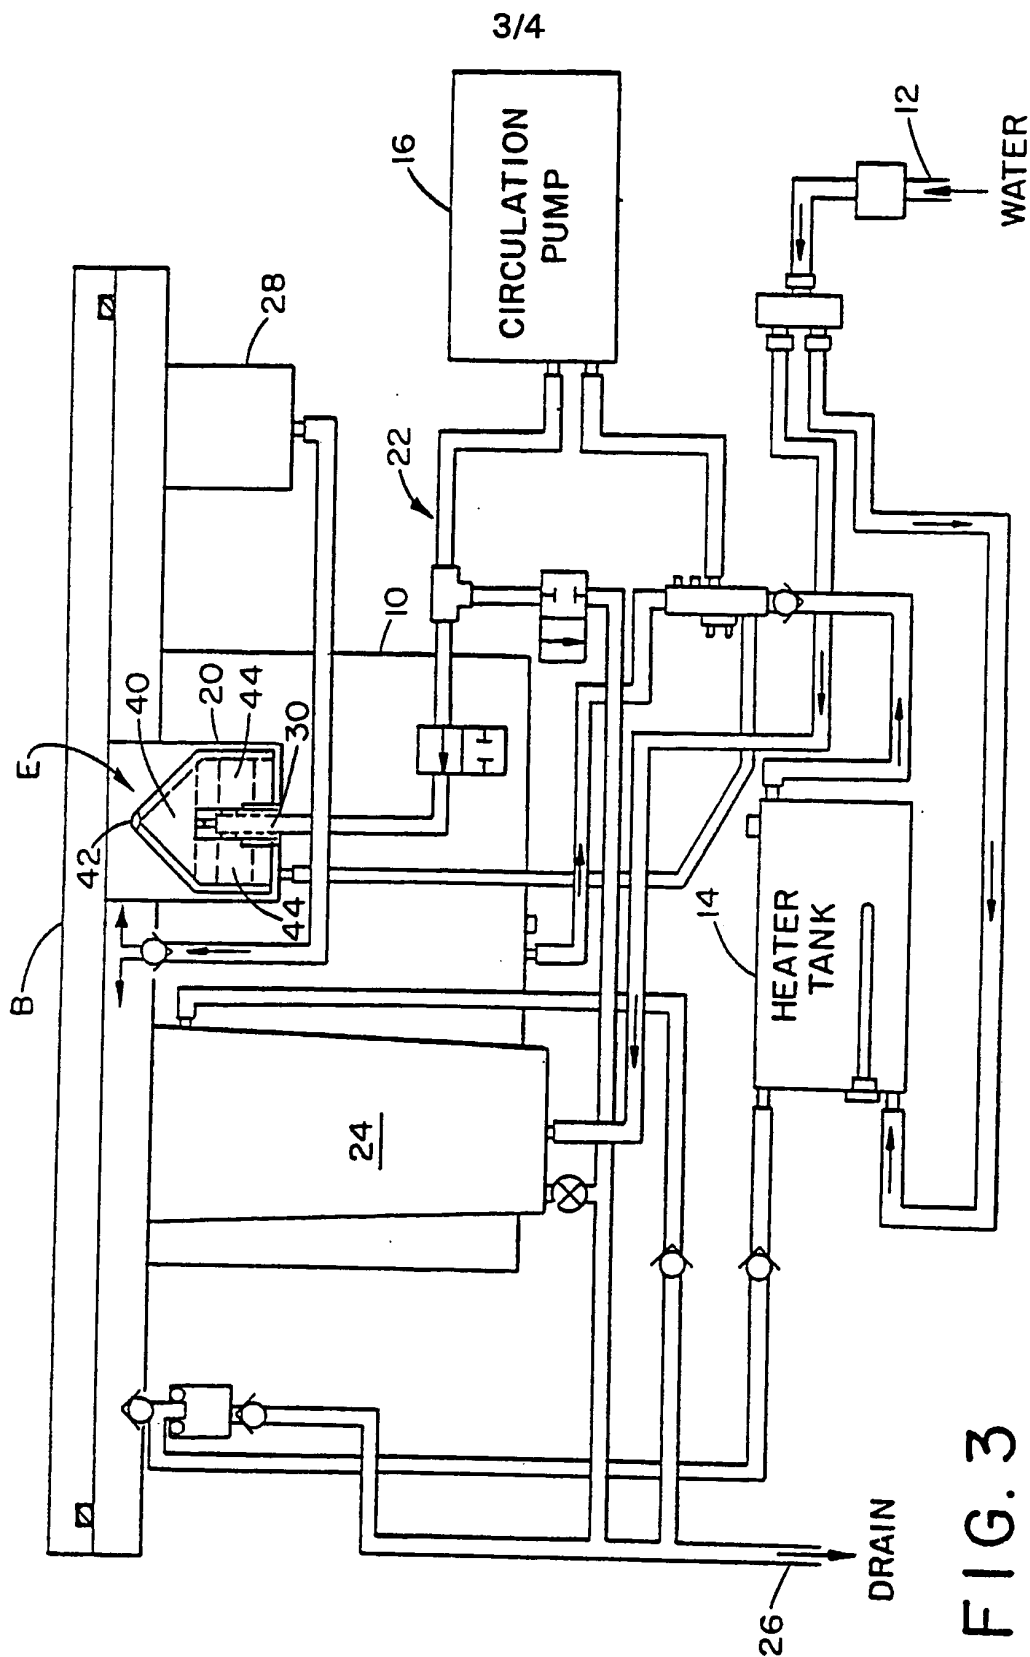


FIG. 3

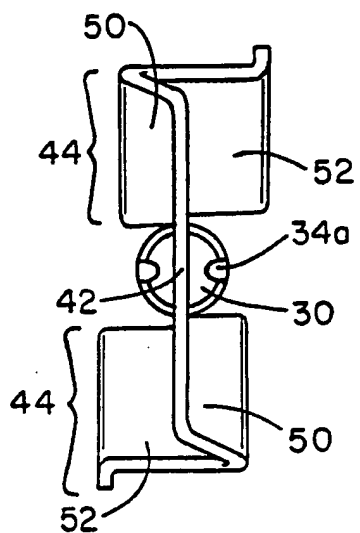


FIG. 4

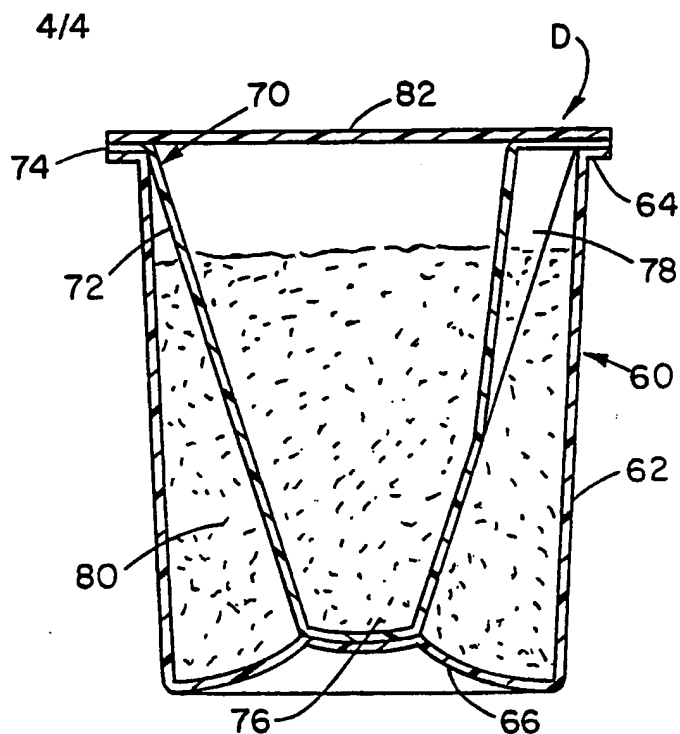


FIG. 7

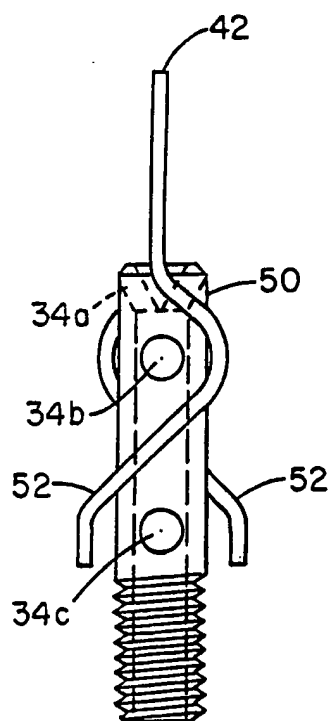


FIG. 5

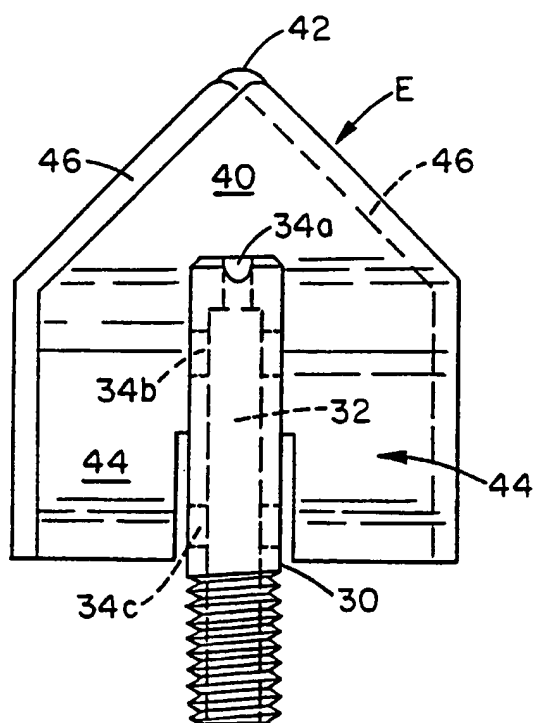


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/06980

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61L2/18 B65B69/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A61L B65B B26D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,5 209 909 (SIEGEL ET AL.) 11 May 1993 cited in the application	1,4,7
A	see the whole document	10
Y	GB,A,2 082 540 (MID-ANGLIA PROJECT ENGINEERING LIMITED) 10 March 1982 see abstract; figures	1,4,7
Y	EP,A,0 332 310 (STERIS CORPORATIO) 13 September 1989 see abstract; figures	8,9
Y	DE,A,18 03 371 (UNILEVER N.V.) 4 June 1969 see page 8, paragraph 2 - page 10, paragraph 1; figures	8,9
A	US,A,2 772 009 (PLUSQUELLIC) 27 November 1956	
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

26 September 1995

Date of mailing of the international search report

04. 10. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vaglianti, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/06980

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
2 A	CH,A,641 359 (TROESCH) 29 February 1984 -----	
3		

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. nal Application No

PCT/US 95/06980

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US-A-5209909	11-05-93	US-A-	4731222	15-03-88
		AU-B-	657177	02-03-95
		AU-A-	2844592	20-05-93
		CA-A-	2076248	19-05-93
		EP-A-	0543591	26-05-93
		JP-A-	5208039	20-08-93
		JP-B-	6073541	21-09-94
		NZ-A-	244981	22-12-94
		SE-A-	9203308	19-05-93
		US-A-	5374394	20-12-94
		US-A-	5407685	18-04-95
		US-A-	5350563	27-09-94
		CA-A-	1273774	11-09-90
		EP-A, B	0232170	12-08-87
		JP-C-	1745511	25-03-93
		JP-B-	4030865	22-05-92
		JP-A-	62186860	15-08-87
		US-A-	5391360	21-02-95
		US-A-	4892706	09-01-90
		US-A-	5037623	06-08-91
		US-A-	5077008	31-12-91
		US-A-	5116575	26-05-92
		US-A-	5091343	25-02-92
		US-A-	5217698	08-06-93
		US-A-	5225160	06-07-93

GB-A-2082540	10-03-82	NONE		

EP-A-332310	13-09-89	US-A-	5037623	06-08-91
		CA-A-	1320030	13-07-93
		DE-D-	68911339	27-01-94
		DE-T-	68911339	07-04-94
		ES-T-	2047109	16-02-94
		JP-A-	1274765	02-11-89
		JP-C-	1852815	21-06-94
		US-A-	5391360	21-02-95
		US-A-	5374394	20-12-94
		US-A-	5407685	18-04-95
		US-A-	5350563	27-09-94
		US-A-	5116575	26-05-92

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Application No

PCT/US 95/06980

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-332310		US-A- 5217698 US-A- 5225160	08-06-93 06-07-93
DE-A-1803371	04-06-69	BE-A- 722591 FR-A- 1588717 NL-A- 6714247	18-04-69 17-04-70 22-04-69
US-A-2772009	27-11-56	NONE	
CH-A-641359	29-02-84	NONE	

THIS PAGE BLANK (USPTO)